



# WOMEN WELFARE HYGIENIC PRODUCTS

AN ISO & CE Certified

MSME CERTIFIED

GEM Registered Supplier



Wisdom For Your Life

# Sanitary Napkin Incinerator

Wall Mountable & Front loading Army Color  
fully Automatic machine





# Burning Capacity: 400 PADS/Day

380 to 400 Pads per day.

20-25 pads per cycle within 20 to 25 minutes.

\*\* Insert up to 12 pads at a time.



Burning Capacity  
**380-400**  
PADS/DAY

  
**20-25**  
PADS/CYCLE

# Dimensions

Length-305 mm x Breadth-305 mm x Height-525 mm, Weight-18 kg



# Machine Features & Specification

01 Napkin Drop Point

02 Ash Collection Tray


03 Indicator

04 Start Push Button

05 Temp & Burning Time Display

06 Smoke exhaust pipe

07 MCB Control

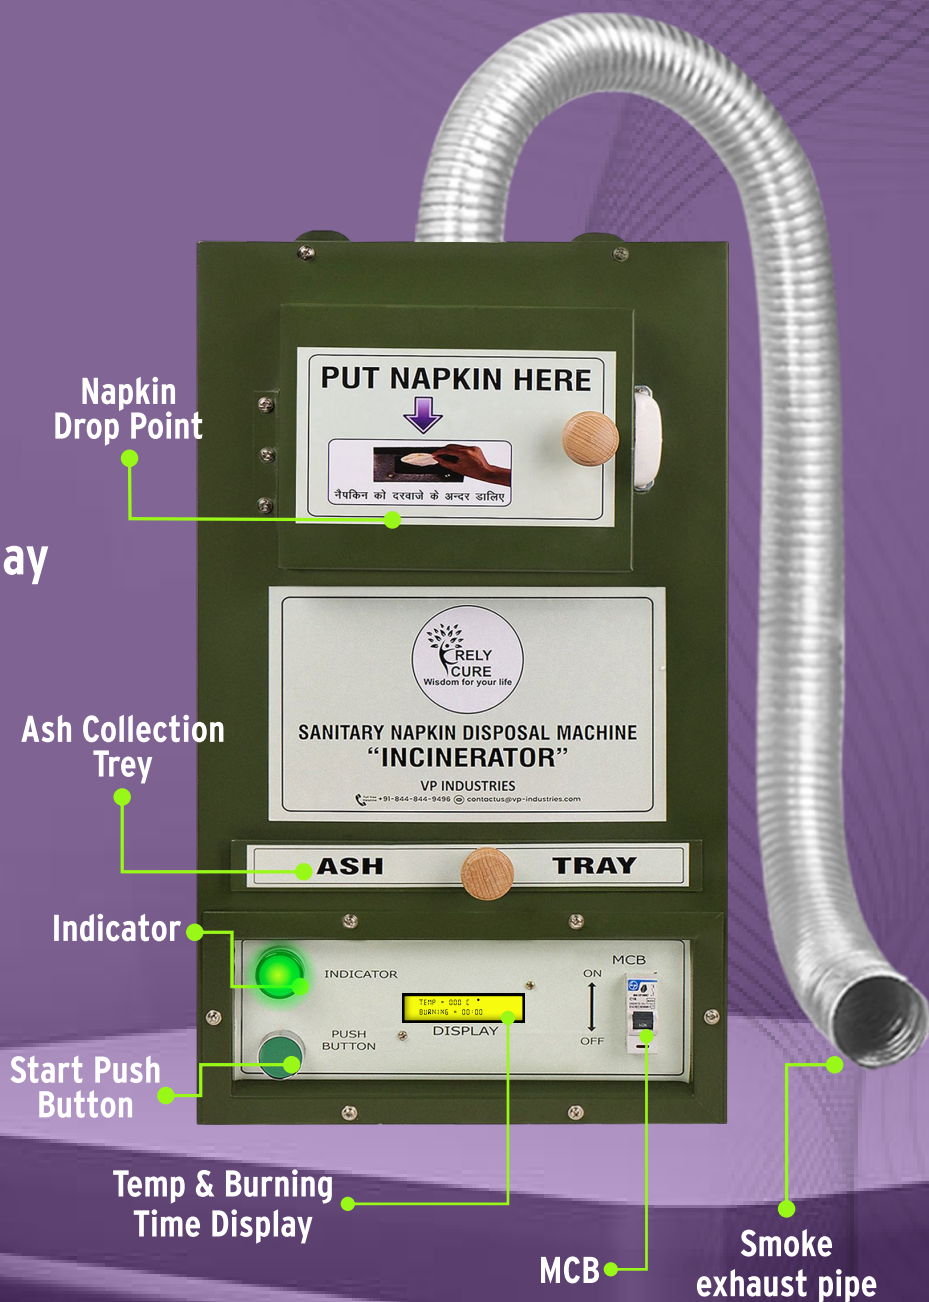

# Operating Mechanism

## Instruction for use:

- 01): Connect the unit with supply through **16 AMP** plug.
- 02): Turn "**ON**" MCB to start the machine.
- 03): Open the door & put the used napkin in drop point
- 04): Close the loading door properly
- 05): Press "**PUSH**" button for burn napkins
- 06): Wait for 20-25 minutes for burning napkin
- 07): Machine will shutdown automatically  
(Auto turn off feature)
- 08): Ash collection tray for easy cleaning


Electric Socket  
board (16 Amp)

Put Your  
Napkin here



# Easy Wall Mountable Using Screw

## Box Component & Accessories:

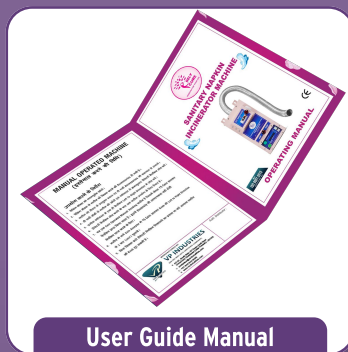

# More Information



Mode Of Function	Electronically Operated, Fully Automatic
Color	Olive Green With Vinyl Branding Sticker
Electrical Part	1200W Ceramic Heater, Power Supply 230v With Safety MCB (16Amp), Indicator, Push Button,
Machine Functioning	Burn Used Sanitary Napkins To Sterile Ash And Stop Automatically (Auto Turn Off Feature), Easy Removing Ash Collecting Tray Ensures Cleanliness.
Micro Controller	Provided Automatic Digital Display Controller To See Actual Set Timer And Temperature
Burning Waste	Completely Burn The Solid Napkin, Residue Ash Per Napkin Less Them 1 Milligram
Temperature	Minimum Burning Temperature 400 Degree Inner Burning Chamber And Skin Temperature Of The Unit Under Operation 16°C
Material Of Thermal Insulation	Double Thermal Insulation For Extra Protection Of Ceramic Fibre Board (Thickness: 25mm) & Glafibre Blanket (Density 64)
Machine Material	Mild Steel Body With Epoxy Anti Rust Proof Powder Coated For Superior Finish ( DFT 100 Micron
Emission Outlet Pipe Location	Top Of Machine (To Be Supplied Along With Machine 5 Ft)
Warranty	12 Months Standard Brand Warranty
Type Of Packaging	Packing Of Thermocol And Carton Cardboard Fitment Box
Easy To Installtion	With The Help Of Mounting Accessories Provided , Hang The Machine On Wall & Start Collecting The Napkins.
Customer Support	24x7 Customer Support





*Thanks for  
connecting, us...*

**Office & Manufacturing Unit: VP INDUSTRIES.**

**A0-91, Amrit Steel Compound, South Side Industrial  
Area, Ghaziabad-201001**

**AN ISO & CE Certified**

**MSME CERTIFIED**

**GEM Registered Supplier**

 **+91-8512895000**



 **+91-9560532288**

